


ACOUSTI-TACK (ATF)

G&S Acoustics' Acousti-Tack (ATF) wall panels are **excellent sound-absorbing panels and tackboards**. Our functional ATF panels have a compound core of 1/8" high density fiberglass facing, laminated to 6-7 pcf fiberglass.

The fiberglass facing sheet gives our ATF panel an **impact-resistant tackboard** with increased sound absorption ability. The 6-7 pcf fiberglass core is the primary source for sound absorption; and it is available in a variety of thicknesses. Review the acoustical performance for each core thickness listed below to make your selection.

Choose ATF panels for locations that require sound-absorbing, impact-resistant tackboards. ATF panels are especially useful in conference rooms, corridors, classrooms, libraries, theatres and high-traffic areas.


CORE SECTION

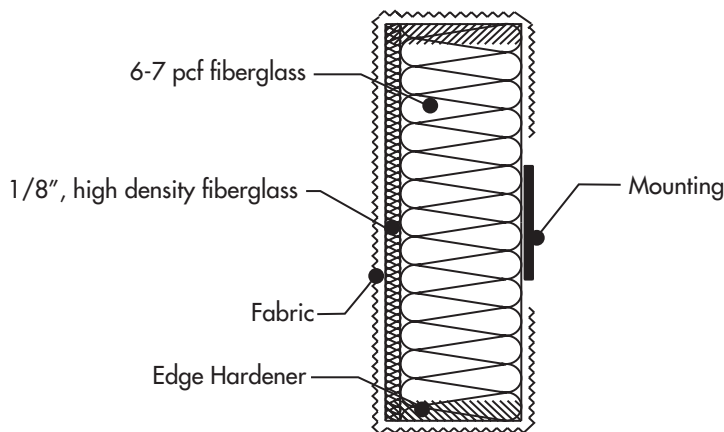

SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	NRC
ATF .625	.07	.23	.72	1.02	1.09	1.02	.75
ATF .875	.11	.29	.89	1.07	1.05	.94	.85
ATF 1.125	.27	.61	.98	.98	.93	.94	.90
ATF 1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
ATF 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10
ATF 3.125	.94	1.01	1.21	1.18	1.13	1.08	1.15
ATF 4.125	1.12	1.23	1.33	1.25	1.21	1.18	1.25

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

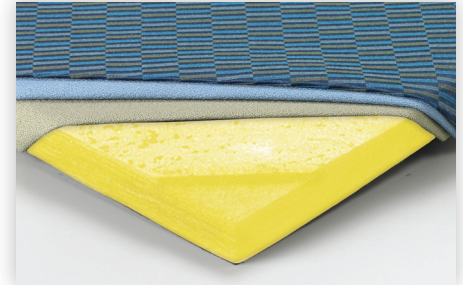

CORE

Facing: 1/8", high density fiberglass
Backing: 6-7 pcf fiberglass, 1/2"-4" thick

SIZES

Custom sizes and shapes up to 4'x10' and some thicknesses up to 5'x10'

MOUNTING

Adhesive, impaling clips, two-part Z-clips

FINISH

Fabric

EDGES

Square, beveled, radiused
Hardened

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

*Controlling
Sound
Beautifully*