


# ACOUSTI-TACK (ATM)

G&S Acoustics' Acousti-Tack (ATM) wall panels function as both an **excellent tackboard** and an **effective sound-absorbing panel**. These characteristics combine to make our product the choice for tackboards in classrooms, hallways and conference rooms. ATM panels are also lightweight and easy to install.

Our ATM panels have a perforated mineral fiberboard core that provides sound absorption by trapping sound vibrations. The mineral fiber core is not wood based; and it will not absorb or release moisture. This ensures that ATM panels will not expand or contract. ATM panels will not warp or shrink after installation.



## CORE SECTION

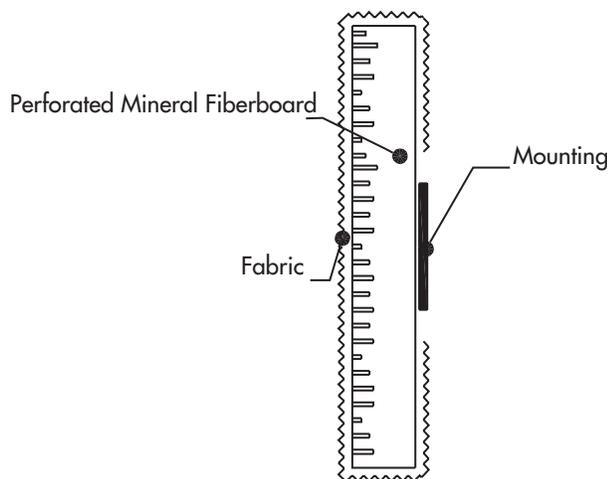

## SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	N.R.C.
ATM	.11	.25	.54	.61	.76	.73	.55

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

**CORE**  
5/8" thick, perforated mineral fiberboard

**SIZES**  
Custom sizes and shapes up to 4'x10'

**MOUNTING**  
Adhesive,  
Two-part Z-clips (Requires metal plates)

**FINISH**  
Fabric

**EDGES**  
Square, beveled, radiused

**FLAMMABILITY**  
All components have a Class "A" rating per ASTM E84

*Controlling  
Sound  
Beautifully*