


# Acousti-Felt Wall Panels (AFP)



Acousti-Felt (AFP) panels provide the look of felt and excellent sound absorption. This product combines a high-performance, sound-absorbing, fiberglass core with the appearance of felt. Now there is no need to sacrifice sound absorption for the look of felt panels. Acousti-Felt panels are offered in thicknesses of 1" and 2" with NRC values from .55 to 1.15. Low frequency absorption is very good with the thicker Acousti-Felt panels.

While low-frequency absorption is difficult to achieve with thin panels, the thick Acousti-Felt panels are very good low-frequency sound absorbers. Review the acoustical performance for each core thickness listed below.

If you want the look of felt, and great sound absorption, then the Acousti-Felt panel is the right choice.

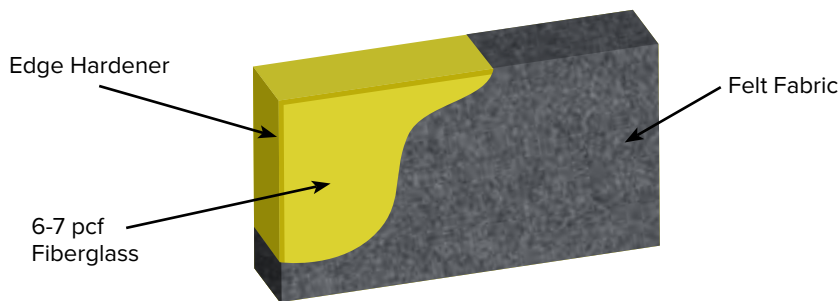

## SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	N.R.C.
AFP 1	.15	.32	.83	1.09	1.17	1.07	.85
AFP 2	.35	.71	1.20	1.31	1.21	1.18	1.10

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.



## CORE

6-7 pcf fiberglass,  
1" & 2" thick

## SIZES

Custom sizes and shapes  
up to 4'x12'

## MOUNTING

Adhesive, impaling clips,  
two-part Z-clips

## FINISH

Felt

## EDGES

Square, beveled, radiused  
Hardened

## FLAMMABILITY

All components have a  
Class "A" rating per ASTM E84

## COLORS



**CONTROLLING SOUND BEAUTIFULLY**

800-737-0307 • 636-225-8800 • [www.gsacoustics.com](http://www.gsacoustics.com)