


MOSAIC PANELS (MP)



Mosaic Panels (MP) combine sound absorption with unlimited design potential. Using your design creation, G&S Acoustics can **transform an Acousti-Panel into a work of art** by custom cutting straight or curved lines into acoustical panels.

Mosaic Panels can be wall mounted or ceiling mounted and are created as single panels with multiple fabrics. Various acoustical cores and sizes offered by G&S Acoustics can be used with Mosaic Panels. Panels are a minimum of 1-1/8" thick.

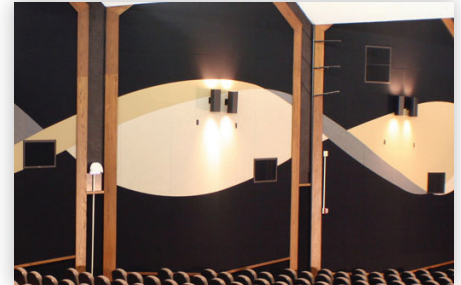

MOSAIC PANELS - MP

✂ Panel 1 ✂ Panel 2 ✂ Panel 3 ✂

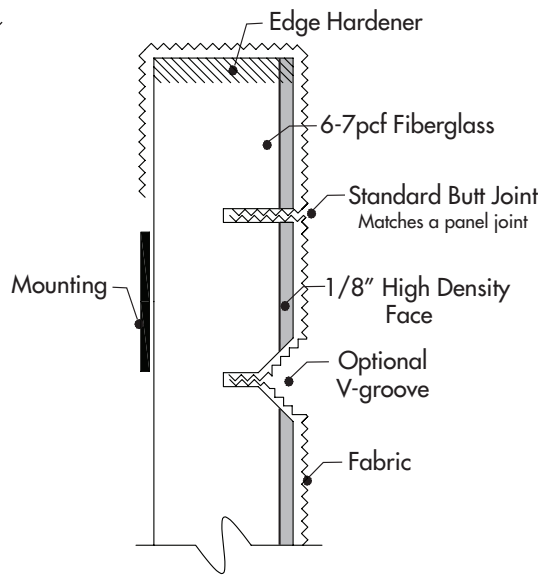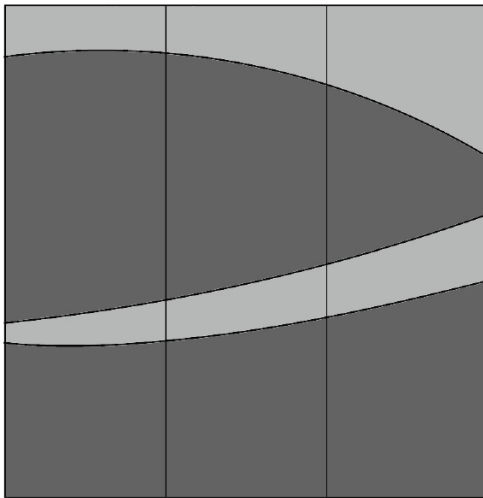

Limitations apply to width and depth of optional v-grooves

CORE

Facing: 1/8", high density fiberglass
Backing: 6-7 pcf fiberglass, 1.125" - 4.125" thick

SIZES

Custom sizes and shapes up to 5'x10'
Full wall applications also available
*Some size restrictions apply, [see website](#)

MOUNTING

Adhesive, impaling clips, two-part Z-clips

FINISH

Standard Fabric Only, Other fabrics must be approved

EDGES

Square, beveled, radiused
Hardened

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

SOUND ABSORPTION

Acoustical Panel with High-Impact Face (MP-ATF)

Hz	125	250	500	1000	2000	4000	N.R.C.
MP-ATF1.125	.27	.61	.98	.98	.93	.94	.90
MP-ATF1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
MP-ATF2.125	.56	.92	1.17	1.12	1.11	1.07	1.10

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

*Controlling
Sound
Beautifully*