
ACOUSTI-TACK (ATM) WALL PANELS



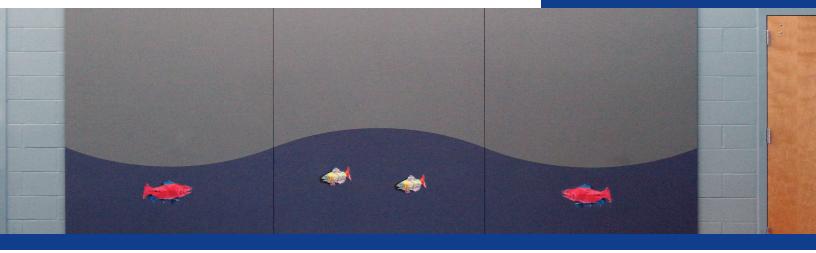

PRODUCT FEATURES

- Excellent tackboard
- · Good sound absorption
- Classrooms/conference rooms
- CORE

Perforated mineral fiber board 5/8" thick

SIZES

Up to 4' x 10'

MOUNTING

Adhesive

EDGES

Square, beveled, radiused

FINISH

Fabric, Vinyl

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

- · Custom shapes and sizes
- Perforated mineral fiber board will not warp
- · Fabric and vinyl finish

SOUND ABSORPTION

| Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC |
|-----|-----|-----|-----|------|------|------|-----|
| ATM | .11 | .25 | .54 | .61 | .76 | .73 | .55 |

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

