

# WALL MOUNTING:

## Continuous Hanger Bar (CHB) and Metal Plate (MP55Z) for TW and ATM

### APPLICATION:


For wall mounting mineral board panels with Z-clips.

### DESCRIPTION:

This installation technique uses a factory applied 5"x5" metal plate with "Z" punch out and a continuous hanger bar fastened to the wall. Installation is as follows:


1. Locate installation points of the CHB48S, by measuring the location of the "Z" punch on the back of each panel.
2. Install the CHB48S to the wall with appropriate fasteners for the wall condition and type. Fasten to studs when possible (fasteners not provided by G&S). Allow for 3/4" reveal.
3. Lift panels so "Z" clip punchouts are above wall mounted CHB48S. Lower the panel to engage clips. Verify all clips are engaged.
4. If Safety Clips are required to prevent lifting of panels, please contact G&S Acoustics.

### Wall Mounting Detail

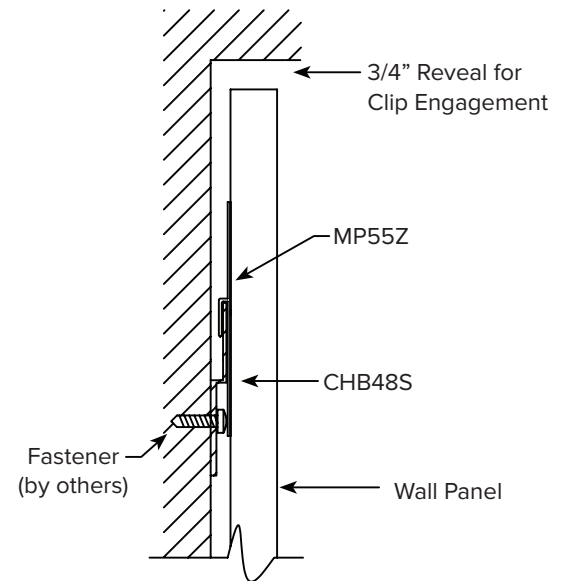

### CHB48S

Elevation




Side View



### MP55Z







Elevation



Side View



# Standard Locations for Metal Plates (MP55Z) on TW & ATM Panels

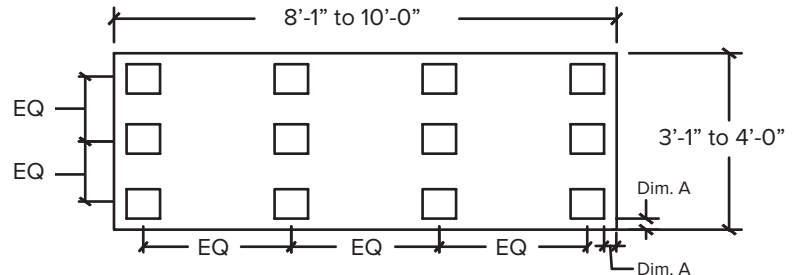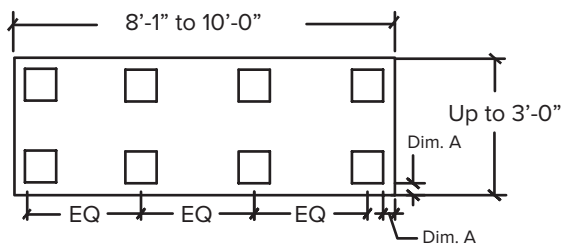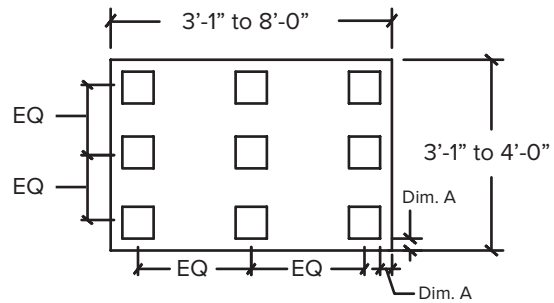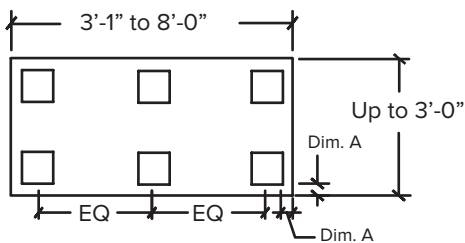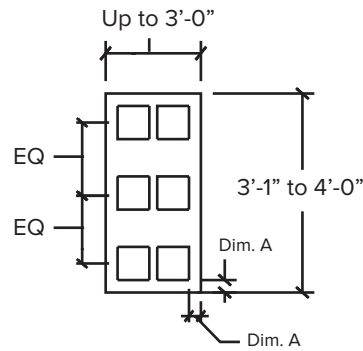

**Dim. A** 3" from edge

**Note** 3'-0" or under, remove center row