

Melody mVerse - Baffles

with CableLock - Ceiling Installation

APPLICATION:

For ceiling mounting Melody mVerse Baffles using CableLock and Cable.

TOOLS NEEDED:

(2) Phillips Screwdrivers

MOUNTING HARDWARE:



INSTALLATION INSTRUCTIONS:


1. A Verse Baffle requires two (2) CableLocks. Each CableLock is located 12" from end of baffle. The CableLock base comes pre-installed on the mVerse Baffle. Use caution not to bump or hit installed CableLock base.
2. Screw CableLock Gripper into the top of each CableLock. Tighten by hand to snug.
3. Insert the cable into the top of each CableLock gripper, leaving 1" of cable hanging out of the CableLock. The cable will automatically lock in place. To release cable, press down on the top of the CableLock gripper and pull on the cable.
4. Repeat this process until all baffles have CableLock Grippers and cable fully installed.

The mVerse Baffle is now ready to hang. Use appropriate fasteners and hardware to install the baffles from the structure. All cables from mVerse baffle must be hung plumb and all mounting points in-line, failure to do so can cause baffle to curve or bend. Remove all stickers before hanging.

HANDLING AND STORAGE

Melody panels must be stored indoors in a dry, climate controlled environment at all times. Exposure to moisture, excessive heat or humidity can cause panels to warp and/or stain.

Panels should be stored in a flat, fully supported, horizontal position and NOT on edge. It is recommended that 2 people carry each panel. Panel should be carried on edge, being careful not to bend panel at any time. Clean white gloves are also recommended when handling Melody panels.

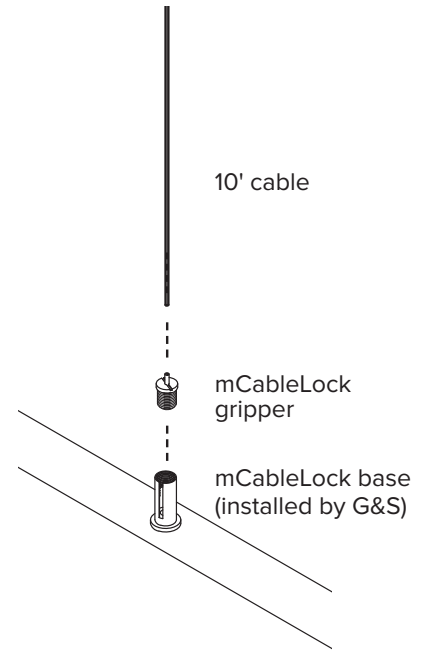

Melody