


ACOUSTI-TACK CEILING (ATFC)

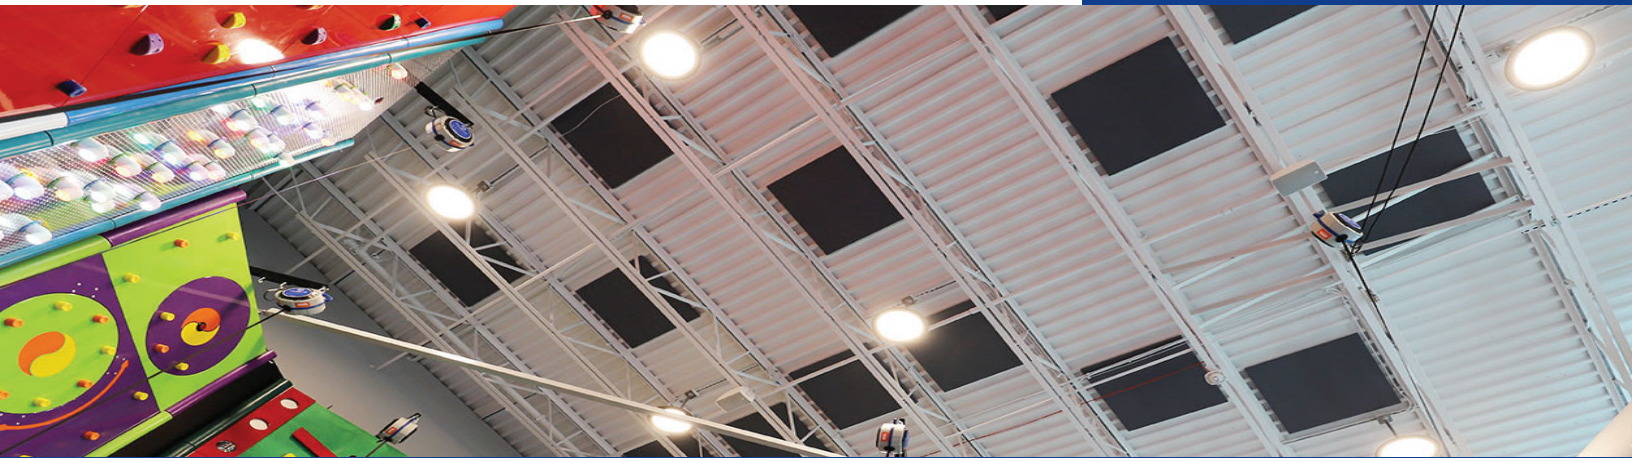

PRODUCT FEATURES

- Fabric Finish
- Durable facing sheet
- Variety of mounting options
- Custom sizes and shapes
- Typical applications include band rooms, auditoriums and churches

CORE

Facing: 1/8", high density fiberglass

Backing: 6 - 7 pcf fiberglass

1" - 2" thick

SIZES

Direct Mount: up to 4' x 8'

Lay-In: up to 4' x 4'

MOUNTING

Lay-in grid, continuous hanger bar, pucks

EDGES

Square, bevel, micro-bevel (for adjoined panels), radiused. Hardened if required

FINISH

Fabric finish

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

SOUND ABSORPTION - Direct Mount

Hz	125	250	500	1000	2000	4000	NRC
ATFC 1.125	.27	.61	.98	.98	.93	.94	.90
ATFC 1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
ATFC 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

An optional foil backing is available.



CONTROLLING SOUND BEAUTIFULLY

800-737-0307 • 636-225-8800
gsacoustics.com

