


ACOUSTI-IMPACT (AIP) WALL PANELS

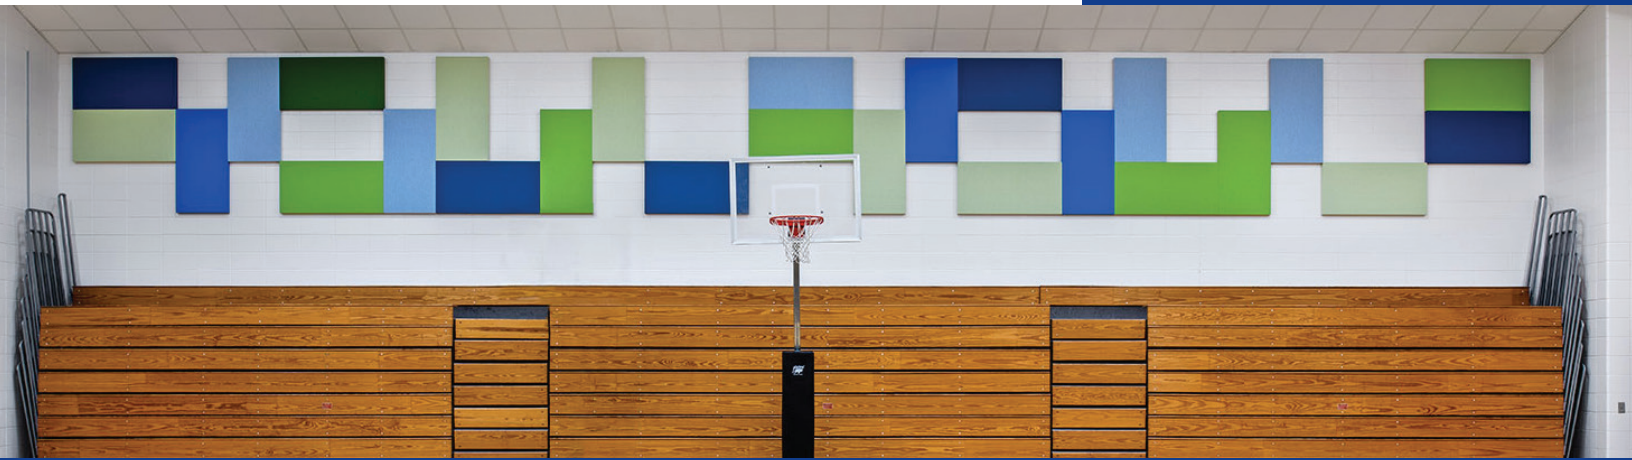

PRODUCT FEATURES

- Impact resilient panels
- Ideal for lightweight and thin fabrics
- Durable enough for a gym
- Custom shapes and sizes
- Fabric finish
- Available in a variety of thicknesses

CORE

Facing: High density scrim
Backing: 6 - 7 pcf fiberglass
1/2" - 4" thick

SIZES

Up to 4' x 12' and 5' x 10'

*Some size restrictions apply, [see website](#)

MOUNTING

Adhesive, impaling clips, two-part Z-clips

EDGES

Square, beveled and radiused

FINISH

Fabric finish

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	NRC
AIP .5	.07	.09	.35	.77	.98	1.03	.55
AIP .75	.04	.19	.59	.91	1.05	1.02	.70
AIP 1	.10	.25	.84	1.08	1.13	1.11	.85
AIP 1.5	.31	.58	1.03	1.10	1.05	1.04	.95
AIP 2	.42	.89	1.12	1.07	1.10	1.09	1.05
AIP 3	.75	.89	1.11	1.21	1.21	1.20	1.10
AIP 4	.87	.87	1.24	1.26	1.26	1.25	1.15

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

CONTROLLING SOUND BEAUTIFULLY

800-737-0307 • 636-225-8800
gsacoustics.com

