

aCapella V-Bar Baffles with CableLock Plates - Ceiling Installation


APPLICATION:

For ceiling mounting aCapella V-Bar Baffles using CableLock Plates and Cable. Before installing make sure there are no obstructions and that you are using the correct fasteners for the ceiling subsurface.


TOOLS NEEDED:

Phillips Screwdriver


Step 1-4

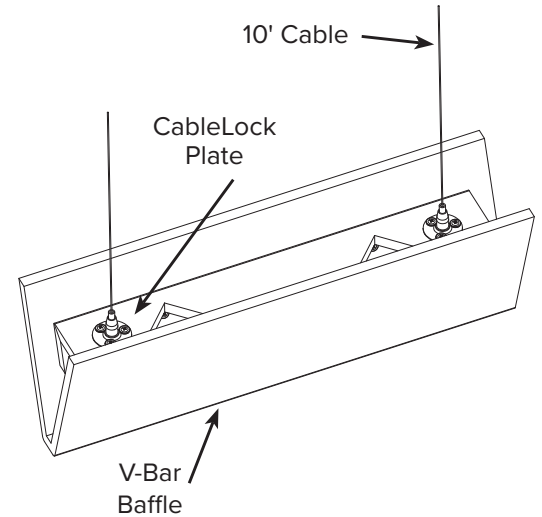

CableLock Plate



#8 x 3/4" Truss
Head Sharp
Point Sheet
Metal Screw




10' Cable

INSTALLATION INSTRUCTIONS:

1. A V-Bar Baffle requires two (2) CableLock Plates. Each CableLock Plate is located 12" from end of baffle. See Elevation 1.
2. Using three (3) #8 x 3/4" truss head sharp point sheet metal screws attach each CableLock Plate to the internal strip of aCapella. See Detail 1. Tighten each screw until snug. **Do not overtighten.** Each CableLock Plate to be located 12" from end of baffle and centered on the baffle.
3. Insert the cable 1" into the top of each CableLock Plates. The cable will automatically lock in place. To release cable, press down on the top of the CableLock and pull on the cable.
4. Repeat this process until all baffles have CableLock Plates and cable fully installed.

The V-Bar Baffle is now ready to hang. Use appropriate fasteners and hardware to install the baffles from the structure. Remove all stickers before hanging.

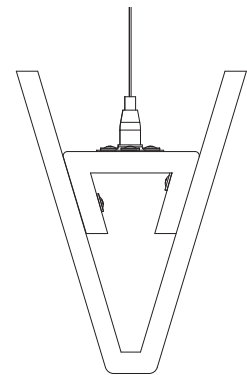

V-Bar
Baffle
Side View

aCapella V-Bar - Baffles


CableLock Plates - Ceiling Installation

HANDLING AND STORAGE

aCapella panels must be stored indoors in a dry, climate controlled environment at all times. Exposure to moisture, excessive heat or humidity can cause panels to warp and/or stain.

Panels should be stored in a flat, fully supported, horizontal position and NOT on edge. It is recommended that 2 people carry each panel. Panel should be carried on edge, being careful not to bend panel at any time. Clean white gloves are also recommended when handling aCapella panels.

Detail 1

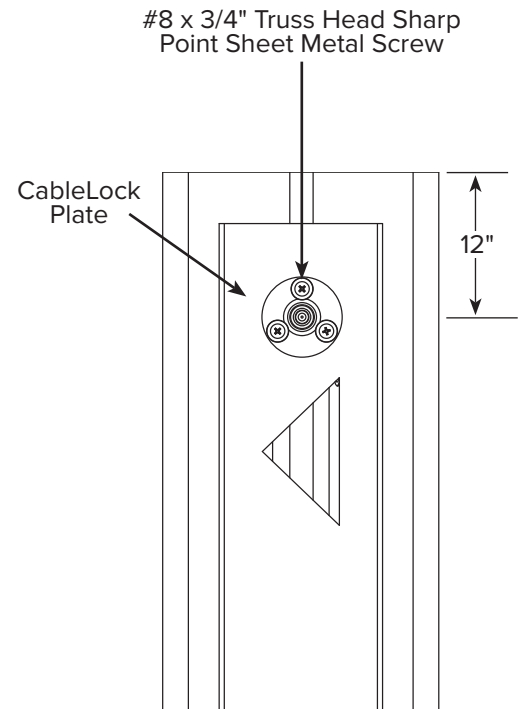

Elevation 1

