


Melody mTiles are **recycled polyester, sound-absorbing ceiling tiles**. mTiles can be installed in a variety of ways, including lay-in grids, direct applied with mechanical fasteners or adhesive. mTiles are available in 5 colors, White in 1" and 2" thick. Colors Black, Silver, Pewter and Khaki available in 1" thick only.

### MOUNTING TYPES

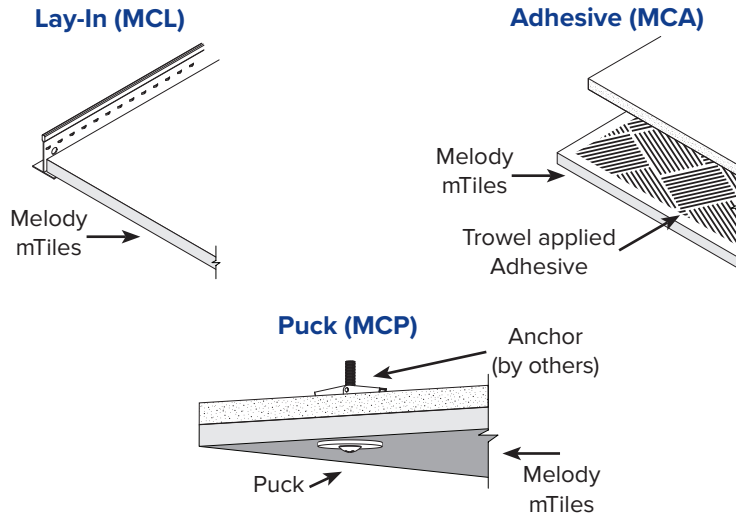

### SOUND ABSORPTION - DIRECT MOUNT TO CEILING (MCA & MCP)

Hz	125	250	500	1000	2000	4000	N.R.C.
MCA-1, MCP-1	.12	.26	.64	.90	1.09	1.12	.70
MCA-2, MCP-2	.32	.66	1.06	1.19	1.20	1.22	1.05

Note: NRC test results based on Type A Mounting.

### SOUND ABSORPTION - LAY-IN CEILING (MCL)

Hz	125	250	500	1000	2000	4000	N.R.C.
MCL-1	.92	1.02	.79	.98	1.01	1.13	.95

Note: NRC test results based on E-400 Mounting.



### CORE

1" (7 pcf) and 2" (5 pcf) Recycled Polyester

### SIZES

Lay-In: Up to 4' x 4' or 2' x 8'  
Adhesive Mount: Up to 4' x 4'  
Puck mount: Up to 4' x 8'

### MOUNTING

Lay-in grid, Adhesive, Pucks

### FINISH\*

White 1" and 2"  
Silver, Pewter, Khaki and Black in 1" only

### EDGES\*\*

Square, beveled (1/2" bevel, excludes Lay-In)  
\*\*Due to inconsistencies in the Melody core thickness, we recommend beveled edges or a 1/4" reveal between adjoining panels.

### CLEANING

Bleach-Cleanable (10:1)  
Water-Based/Solvent (WS)  
Mold & Fungal Resistant (ASTM C1338)

### SUSTAINABILITY


Declare, HPD, Indoor Advantage™ Gold

### FLAMMABILITY

All components have a Class "A" rating per ASTM E84

\*Also available in fabric wrapped (mTiles-Rap), and painted (mTiles-Canvas).

### COLORS



White 1" and 2"    Black 1" Only    Silver 1" Only    Pewter 1" Only    Khaki 1" Only