
# **aCapella**

# aTiles Ceiling

aCapella aTiles are **flat, sound-absorbing and colorful ceiling tiles.** aTiles can be installed in a variety of ways, including lay-in grids and direct applied with mechanical fasteners or adhesive. aTiles provide sound control while adding color to the design of any space. Custom shapes and sizes are available. Choose from 17 standard colors.

# **MOUNTING TYPES**

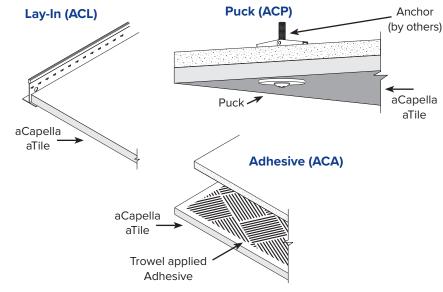

#### SOUND ABSORPTION - DIRECT MOUNT TO CEILING (ACA, ACP)

| Hz       | 125 | 250 | 500 | 1000 | 2000 | 4000 | N.R.C. |
|----------|-----|-----|-----|------|------|------|--------|
| ACA, ACP | .12 | .03 | .23 | .59  | .89  | 1.05 | .45    |

Note: NRC based on Type A Mounting.

### SOUND ABSORPTION - LAY-IN CEILING (ACL)

| Hz  | 125 | 250 | 500 | 1000 | 2000 | 4000 | N.R.C. |
|-----|-----|-----|-----|------|------|------|--------|
| ACL | .89 | .88 | .74 | .86  | .95  | .97  | .85    |

Note: NRC based on E-400 Mounting.



## **CONTROLLING SOUND BEAUTIFULLY**

800-737-0307 • 636-225-8800 • www.gsacoustics.com



#### CORE

1/2" Recycled Polyester

#### SIZES

Puck mount: Up to 4' x 9' Lay-In: 2' x 2', 2' x 4', 4' x 4', 2' x 6' and 2' x 8' Adhesive Mount: Up to 4' x 4'

#### MOUNTING

Pucks, Lay-in grid, Adhesive

#### FINISH

Standard colors or optional Woodwinds finish

#### EDGES\*

Square

\*Due to inconsistencies in the aCapella core thickness, we recommend a 1/4" reveal between adjoining panels.

#### CLEANING

Bleach Cleanable (10:1)\*\* Water-based/Solvent (WS) Mold & Fungal Resistant (ASTM C1338)

#### **SUSTAINABILITY**

Declare, HPD, Indoor Advantage<sup>™</sup> Gold

#### FLAMMABILITY

All components have a Class "A" rating per ASTM E84

#### COLORS



#### **WOODWINDS COLLECTION**



Woodwinds is an upgrade finish, contact G&S for additional cost. \*\*Woodwinds is not bleach cleanable.

