

CEILING MOUNTING: Clouds D-Ring for 2" Clouds

APPLICATION:


For ceiling mounting 2" fiberglass acoustical Clouds with fastening plate and D-Ring.

DESCRIPTION:

This installation technique uses a fastening plate (SGNI) and D-Rings (attached in field) to hang single units individually. Installation is as follows:

1. Install D-Rings to center of metal plate using two (2) #8 x 3/4" truss head self-drilling screws (supplied by G&S).
2. Using 1/8" aircraft cable or other suitable hanging material, secure one end to D-Ring (hanging cable or other material by others).
3. Secure other end to appropriate structure above (structure by others).
4. Mounting locations can vary according to custom sizes.

Do not install panels until wet work, such as concrete and plastering, is complete; the building is enclosed; and the temperature and relative humidity are stabilized at 60 – 80 degrees F (16 – 27 degrees C) and 40% to 50% respectively, by the building HVAC system. Use of **propane heaters** in area with acoustic panels **can cause chemical reactions** with the resin spots causing them to become visible through the face of the panel. **Do not use propane heaters** in areas where these panels are installed.

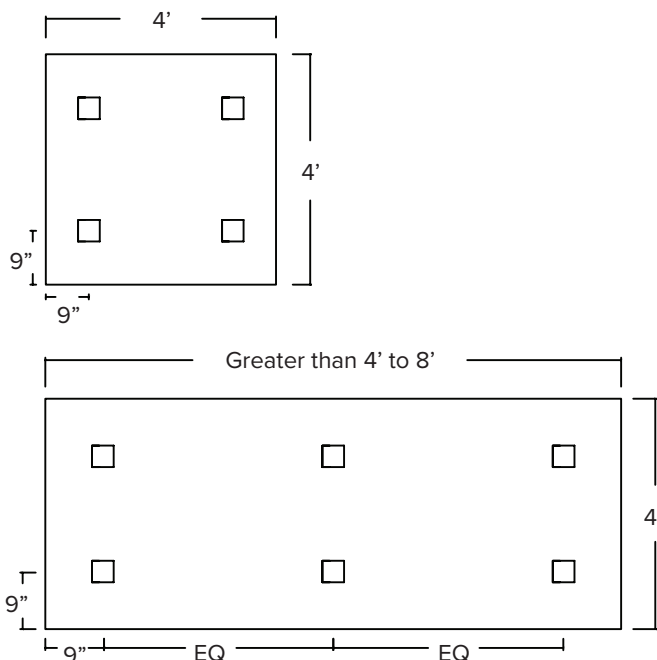

Note: Less than 3'-6" in either direction will require a custom layout.

Mounting Detail

Elevation

