


# ACOUSTI-TACK (ATF) WALL PANELS

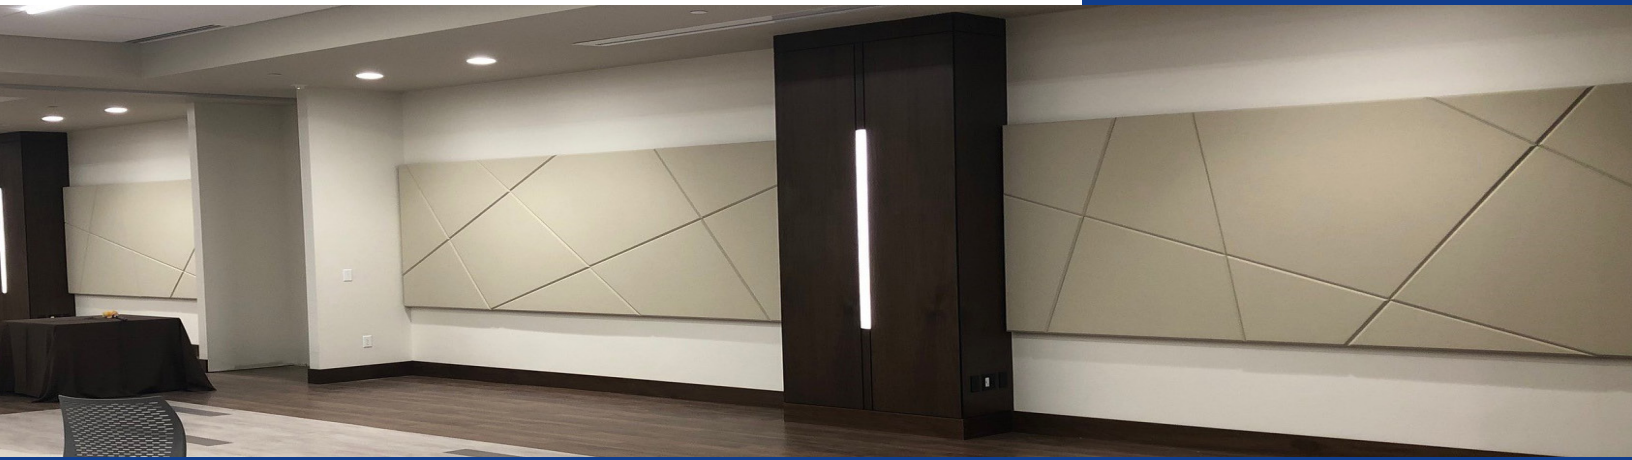

## PRODUCT FEATURES

- Excellent tackboard
- Superior sound absorption
- Impact resistant face layer
- Custom shapes and sizes
- Fabric finish
- Available in a variety of thicknesses

## CORE

Facing: 1/8" high density fiberglass

Backing: 6 - 7 pcf fiberglass

5/8" - 4 1/8" thick

## SIZES

Up to 4' x 10' and 5' x 10'

\*Some size restrictions apply, [see website](#)

## MOUNTING

Adhesive, impaling clips,  
two-part Z-clips

## EDGES

Square, beveled and radiused

## FINISH

Fabric finish

## FLAMMABILITY

All components have a Class "A"  
rating per ASTM E84

## SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	NRC
ATF .625	.07	.23	.72	1.02	1.09	1.02	.75
ATF .875	.11	.29	.89	1.07	1.05	.94	.85
ATF 1.125	.27	.61	.98	.98	.93	.94	.90
ATF 1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
ATF 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10
ATF 3.125	.94	1.01	1.21	1.18	1.13	1.08	1.15
ATF 4.125	1.12	1.23	1.33	1.25	1.21	1.18	1.25

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

**CONTROLLING SOUND BEAUTIFULLY**

800-737-0307 • 636-225-8800  
gsacoustics.com

