

# aCapella SlatWorks

## Direct Grid Mount (SWC) - Ceiling Installation

### APPLICATION:

Installing SlatWorks panels directly to a ceiling grid.

### TOOLS NEEDED:

Utility Knife, Straight Edge, Drill, #6 x 1 5/8" sharp point finish screws (by others)

### INSTALLATION INSTRUCTIONS:


1. Layout placement of panel edges on ceiling grid. Edges should be located on center lines of ceiling grid.
2. Align panel with locating lines/dimensions. Be careful to support entire panel until fastened into the ceiling grid.
3. Install using #6 x 1 5/8" black finish screws through the base layer of the aCapella SlatWorks product into the ceiling grid above. Screws shall be placed no more than 9" on center on each row that a ceiling grid is located. Ceiling grid to be installed 24" on center. Locate screws between raised slates.
4. Cut and fit perimeter pieces using utility knife and straight edge as required.

### HANDLING AND STORAGE


aCapella panels must be stored indoors in a dry, climate controlled environment at all times. Exposure to moisture, excessive heat or humidity can cause panels to warp and/or stain.

Panels should be stored in a flat, fully supported, horizontal position and NOT on edge. It is recommended that 2 people carry each panel. Panel should be carried on edge, being careful not to bend panel at any time. Clean white gloves are also recommended when handling aCapella panels.



### Step 1

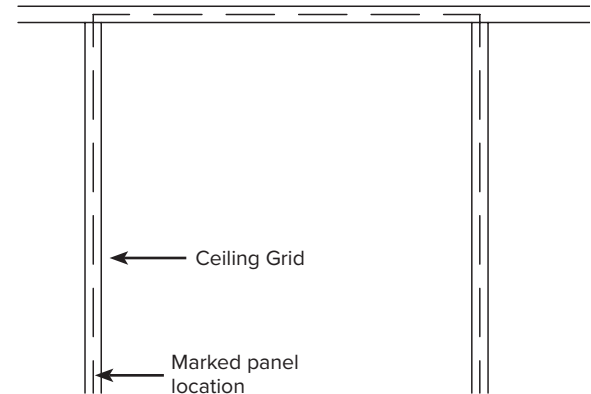

### Step 2

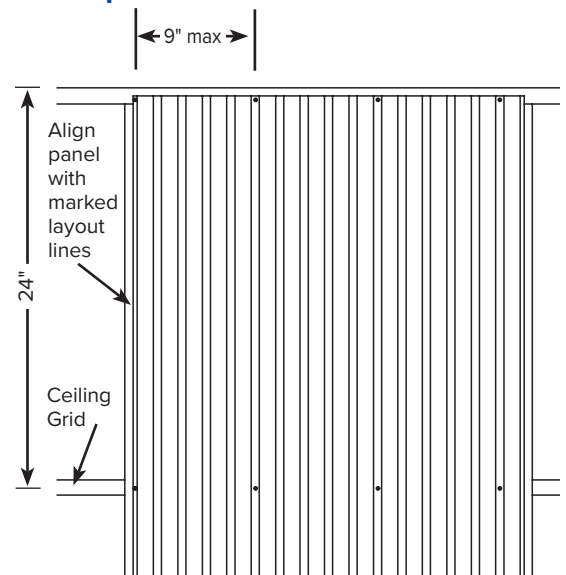

### Step 3

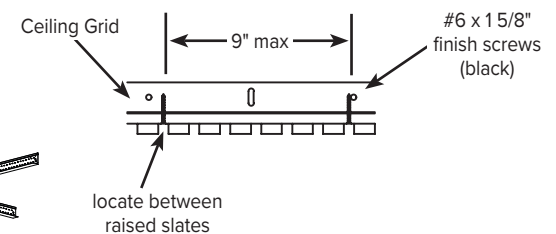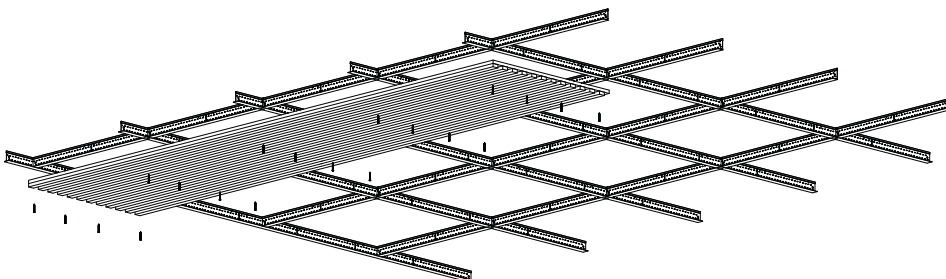

# aCapella