

# ACOUSTI-IMAGE (AI) WALL PANELS



## PRODUCT FEATURES

- Unlimited design potential
- Full wall murals and individual panels
- Quality dye-sublimation printing
- Custom shapes and sizes
- Available with most products
- Available in a variety of thicknesses

## CORE

6 - 7 pcf fiberglass  
1" and 2" thick  
(other core and thicknesses available)

## SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	NRC
AI-AP1	.18	.37	.94	1.16	1.20	1.09	.90
AI-AP2	.42	.89	1.12	1.07	1.10	1.09	1.05

## SIZES

Up to 4' x 10'  
Full wall murals also available

\*Some size restrictions apply, [see website](#)

## MOUNTING

Adhesive, impaling clips,  
two-part Z-clips

## EDGES

Square

## FINISH

Custom printed image on fabric

## FLAMMABILITY

All components have a Class "A"  
rating per ASTM E84

### Mural Panels



— EQ — EQ — EQ — EQ —  
Your High-Resolution Image

### Individual Panel



Image Sources:  
[www.gettyimages.com](http://www.gettyimages.com)  
[www.istockphoto.com](http://www.istockphoto.com)  
[www.corbisimages.com](http://www.corbisimages.com)

**CONTROLLING SOUND BEAUTIFULLY**

800-737-0307 • 636-225-8800  
[gsacoustics.com](http://gsacoustics.com)




# ACOUSTI-IMAGE PRINT REQUIRMENTS



## Resolution Example

Saved at 72 dpi      Saved at 150 dpi

## Individual Panel

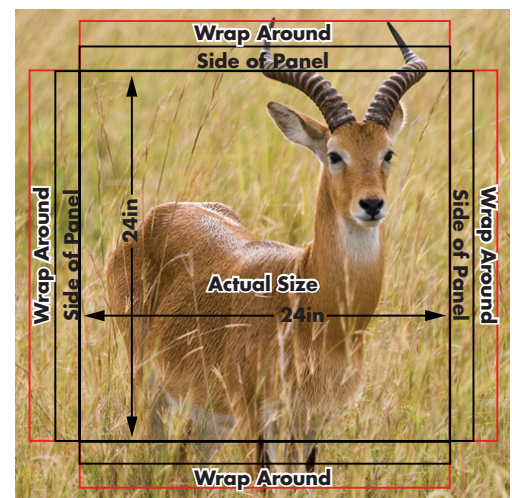

## Sizing, Color, and Resolution:

Images should be sent to scale\* in **CMYK** color mode at **150 DPI** or higher. Anything smaller will not give you a clear resolution (see resolution example).

## Printable Sides and Wrap Around Fabric:

Panels are available in a multitude of thicknesses. It is recommended to account for 1½ times the panel thickness on all sides. This will allow adequate fabric to cover the printed sides, which will result in a clean, smooth look (see example at right).

## Format:

**Software:** Most current version of Adobe Illustrator, Adobe Photoshop and Adobe InDesign are preferred. If you are using software other than these listed, the files need to be in PDF using PDF/X-1:2001 standard settings. Other usable files are: PDF, AI, SVG, EPS, TIFF, or PSD.

**Fonts:** When submitting files, convert all fonts to outlines or curves. If your file has not been converted, please include original font files. Package your file to include linked image and fonts.

**PMS Color Matches:** The most commonly-used color reference for digital printing is the PMS System (Pantone Matching System). When building files, please declare all required PMS colors to be matched. Depending on the printing device and material specified, up to 80% of PMS colors can be matched accurately.

**Panel Sizes:** Individual panels up to 5'x10' and 4'x12'. Full wall murals also available.\*\*

\*Full scale image (at actual size, i.e., 2'x2' = 24"x24") to be provided to G&S Acoustics.

\*\*G&S Acoustics will make appropriate breaks in image to fit panel size (see example at right).

## Mural Panels

