MOSAIC PANELS (MP) WALL PANELS





PRODUCT FEATURES

- Sound absorption with unlimited design
- Multiple colors of fabric on each panel
- Limits overall number of panels to install
- Custom shapes and sizes
- Fabric finish
- Various thicknesses

CORE

Facing: 1/8", high density fiberglass Backing: 6 - 7 pcf fiberglass, 1 1/8" - 2 1/8" thick

SIZES

Up to 4' x 10' and 5' x 10' Full wall applications also available *Some size restrictions apply, see website

MOUNTING

Adhesive, impaling clips, two-part Z-clips

EDGES

Square, beveled, radiused and hardened

FINISH

Standard fabric only, Other fabrics must be approved

FLAMMABILITY


All components have a Class "A" rating per ASTM E84



Acoustical Panel with High-Impact Face (MP-ATF)

		<u> </u>	·	``	,		
Hz	125	250	500	1000	2000	4000	NRC
MP-ATF1.125	.27	.61	.98	.98	.93	.94	.90
MP-ATF1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
MP-ATF2.125	.56	.92	1.17	1.12	1.11	1.07	1.10

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

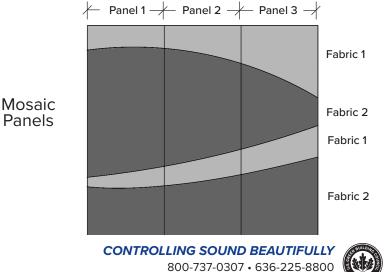

gsacoustics.com