


ACOUSTI-PANELS (AP)

Acousti-Panels (AP) are the most **economical**, sound-absorbing wall panel products by G&S Acoustics. AP panels create a comfortable environment by reducing noise reverberation. Not only are they **durable** enough for a gymnasium, Acousti-Panels are beautiful enough for a boardroom.

Acousti-Panels absorb a wide range of sound frequencies. Absorption levels are based on the panel thickness. Review the acoustical performance for each core thickness listed below to make your selection.

CORE SECTION

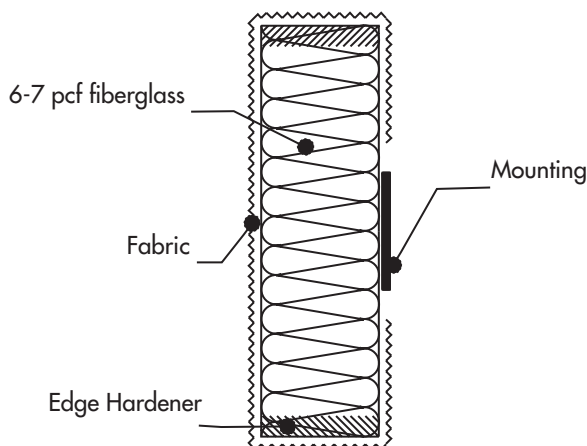

SOUND ABSORPTION

Hz	125	250	500	1000	2000	4000	N.R.C.
AP .5	.07	.09	.35	.77	.98	1.03	.55
AP .75	.04	.19	.59	.91	1.05	1.02	.70
AP 1	.10	.25	.84	1.08	1.13	1.11	.85
AP 1.5	.31	.58	1.03	1.10	1.05	1.04	.95
AP 2	.42	.89	1.12	1.07	1.10	1.09	1.05
AP 3	.75	.89	1.11	1.21	1.21	1.20	1.10
AP 4	.87	.87	1.24	1.26	1.26	1.25	1.15

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.



CORE
6-7 pcf fiberglass,
1/2"-4" thick

SIZES
Custom sizes and shapes up to
4'x12' and 5'x10'
*Some size restrictions apply,
[see website](#)

MOUNTING
Adhesive, impaling clips,
two-part Z-clips

FINISH
Fabric

EDGES
Square, beveled, radiused
Hardened

FLAMMABILITY
All components have a Class "A"
rating per ASTM E84

*Controlling
Sound
Beautifully*