


PINTA CEILING PANELS (PPC)

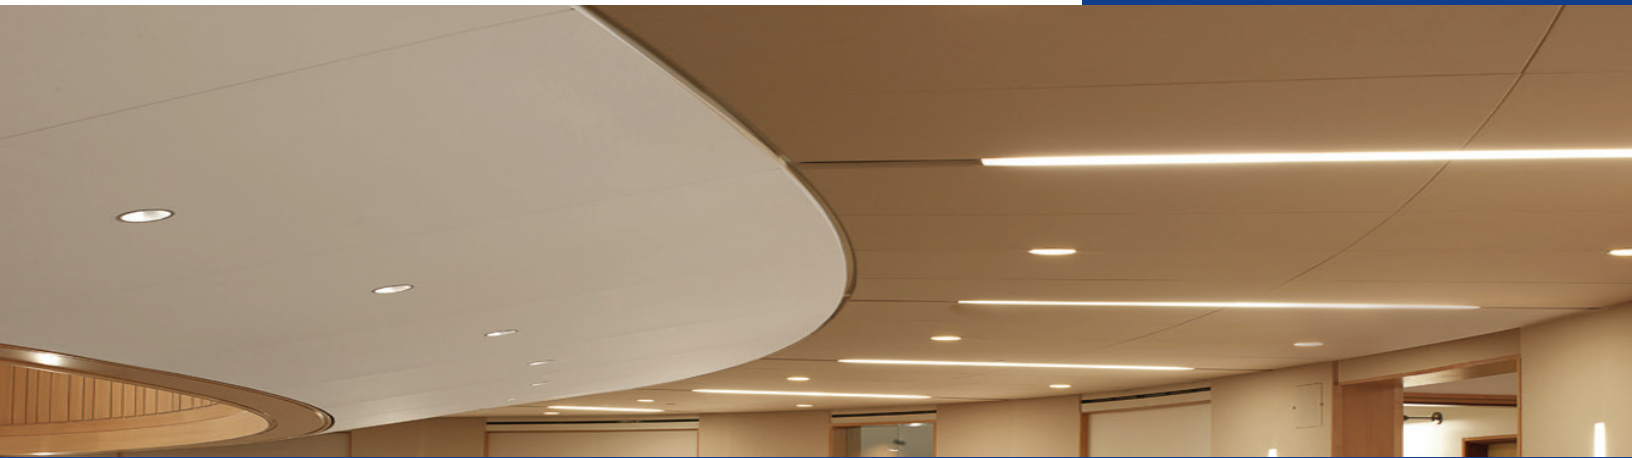

PRODUCT FEATURES

- Painted sound absorbing panels
- Match any Sherwin Williams paint color
- Finished edges
- Excellent sound absorption
- Custom sizes and shapes

CORE

Backing: 6 - 7 pcf fiberglass
Facing: Scrim Fiber

THICKNESS

1" and 2" thick

SIZES

Direct Mount: up to 4' x 8'
Lay-In: up to 4' x 4'

MOUNTING

Lay-in grid, continuous hanger bar, pucks

EDGES

Square and hardened

FINISH

Flat acoustical paint
Mold and mildew resistant surface

FLAMMABILITY

All components have a Class "A" rating per
ASTM E84

SOUND ABSORPTION - Direct Mount

Hz	125	250	500	1000	2000	4000	NRC
PPC 1	.09	.39	.87	1.05	1.04	.88	.85
PPC 2	.54	.82	1.16	1.12	1.03	.94	1.05

SOUND ABSORPTION - Lay-In Ceiling

Hz	125	250	500	1000	2000	4000	NRC
PPC 1	.66	.79	.77	.97	.97	.94	.90

Other products available with a painted Pinta finish:

- Pinta Wall Panels
- SoundWave Pinta Clouds
- Serenade Pinta Clouds

CONTROLLING SOUND BEAUTIFULLY

800-737-0307 • 636-225-8800
gsacoustics.com

