


# MOSAIC PANELS (MP) WALL PANELS

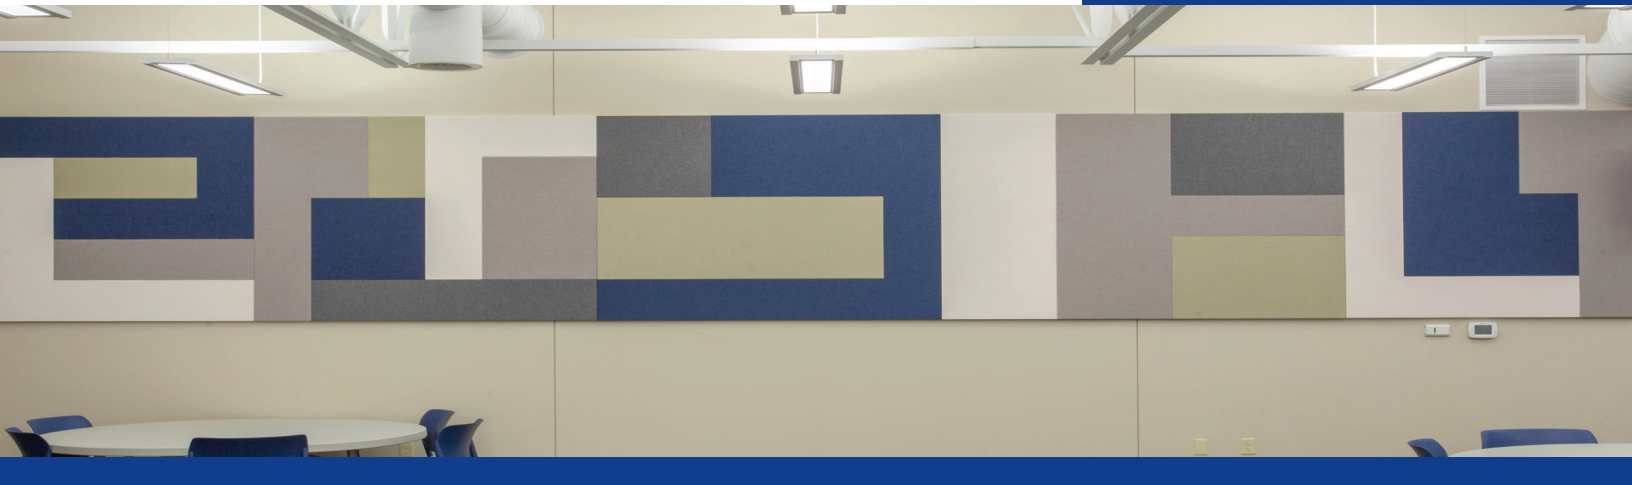

## PRODUCT FEATURES

- Sound absorption with unlimited design
- Multiple colors of fabric on each panel
- Limits overall number of panels to install
- Custom shapes and sizes
- Fabric finish
- Various thicknesses

## CORE

Facing: 1/8", high density fiberglass  
Backing: 6 - 7 pcf fiberglass,  
1 1/8" - 2 1/8" thick

## SIZES

Up to 5' x 10'  
Full wall applications also available

\*Some size restrictions apply, [see website](#)

## MOUNTING

Adhesive, impaling clips,  
two-part Z-clips

## EDGES

Square, beveled, radiused and  
hardened

## FINISH

Standard fabric only,  
Other fabrics must be approved

## FLAMMABILITY


All components have a Class "A" rating  
per ASTM E84

## SOUND ABSORPTION

Acoustical Panel with High-Impact Face (MP-ATF)

Hz	125	250	500	1000	2000	4000	NRC
MP-ATF1.125	.27	.61	.98	.98	.93	.94	.90
MP-ATF1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
MP-ATF2.125	.56	.92	1.17	1.12	1.11	1.07	1.10

Note: NRC test results based on our standard acoustically transparent fabric. Results may vary with other fabrics.

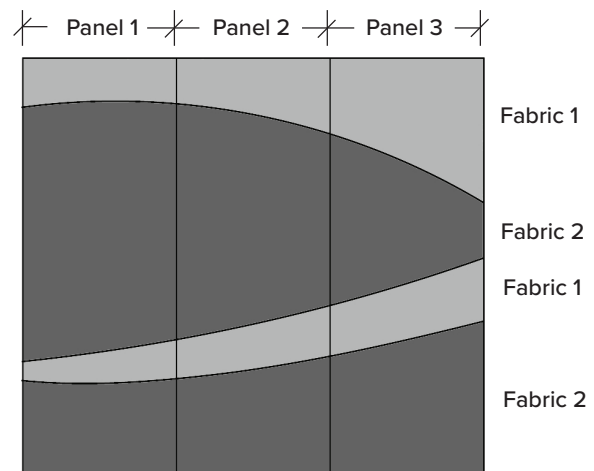

Mosaic  
Panels

**CONTROLLING SOUND BEAUTIFULLY**

800-737-0307 • 636-225-8800  
gsacoustics.com

