

aCapella VERSE-BAR - Baffles with CableLock - Ceiling Installation


APPLICATION:

For ceiling mounting aCapella Verse-Bar Baffles using CableLock and Cable.

TOOLS NEEDED:

(2) Phillips Screwdrivers

MOUNTING HARDWARE:

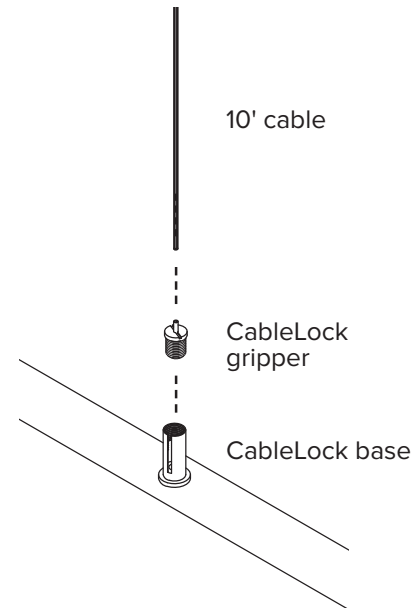

INSTALLATION INSTRUCTIONS:

1. A Verse-Bar requires two (2) CableLocks. Each Cablelock is located 12" from end of baffle. Units over 72" require a third CableLock in the center. The CableLock base comes pre-installed on the Verse-Bar. Use caution not to bump or hit installed CableLock base.
2. Screw CableLock Gripper into the top of each CableLock. Tighten by hand to snug.
3. Insert the cable into the top of each CableLock gripper, leaving 1" of cable hanging out of the CableLock. The cable will automatically lock in place. To release cable, press down on the top of the CableLock gripper and pull on the cable.
4. Repeat this process until all baffles have CableLock Grippers and cable fully installed.

The Verse-Bar Baffle is now ready to hang. Use appropriate fasteners and hardware to install the baffles from the structure. All cables from Verse-Bar baffle must be hung plumb and all mounting points in-line, failure to do so can cause baffle to curve or bend. Remove all stickers before hanging.

HANDLING AND STORAGE

aCapella panels must be stored indoors in a dry, climate controlled environment at all times. Exposure to moisture, excessive heat or humidity can cause panels to warp and/or stain.

Panels should be stored in a flat, fully supported, horizontal position and NOT on edge. It is recommended that 2 people carry each panel. Panel should be carried on edge, being careful not to bend panel at any time. Clean white gloves are also recommended when handling aCapella panels.

