


Melody mTiles-Canvas

Painted Ceiling

Melody mTiles-Canvas are **painted, sound-absorbing ceiling tiles** with a **recycled polyester core** that is mold and fungal resistant. mTiles-Canvas can be installed in a variety of ways, including lay-in grids, direct applied with mechanical fasteners or adhesive.

MOUNTING TYPES

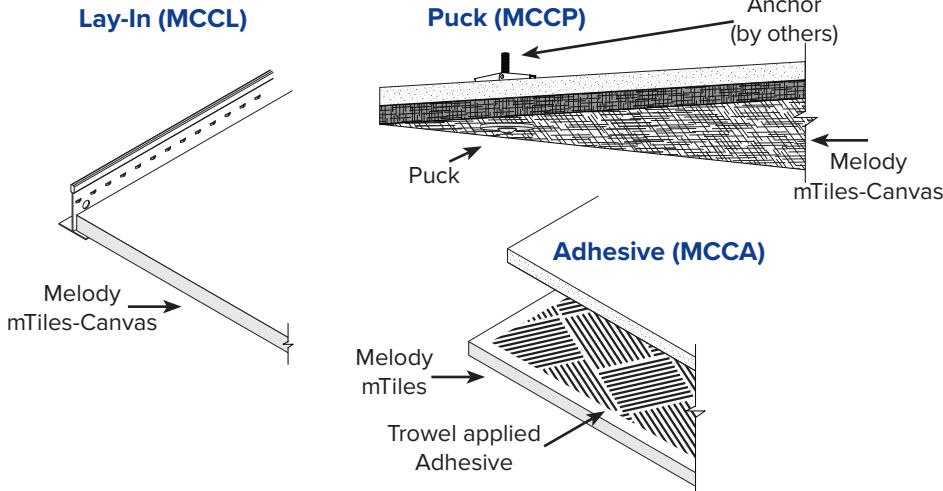

SOUND ABSORPTION - DIRECT MOUNT TO CEILING (MCCP & MCCA)

Hz	125	250	500	1000	2000	4000	N.R.C.
MCC-1	.02	.29	.73	1.05	1.15	0.95	.80

Note: NRC test results based on Type A Mounting.

SOUND ABSORPTION - LAY-IN CEILING (MCCL)

Hz	125	250	500	1000	2000	4000	N.R.C.
MCCL-1	.88	1.00	.80	.99	1.04	1.01	.95

Note: NRC test results based on E-400 Mounting.



CORE

1" (7 pcf) Recycled Polyester
Mold & Fungal Resistant (ASTM C1338)

SIZES

Puck mount: Up to 4' x 8'
Lay-In: Up to 4' x 4' or 2' x 8'
Adhesive Mount: Up to 4' x 4'

MOUNTING

Pucks, Lay-in grid, Adhesive

FINISH

Sherwin Williams flat latex paint

EDGES**

Square, painted

**Due to inconsistencies in the Melody core thickness, we recommend a 1/4" reveal between adjoining panels.


SUSTAINABILITY

Declare, HPD, Indoor Advantage™ Gold

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

Note: Due to the recycled nature of the product, minor imperfections and modeling on the face can occur in the painting process.

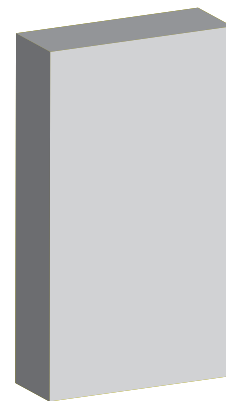

Painted Panel