


aCapella aTiles are **flat, sound-absorbing and colorful ceiling tiles**. aTiles can be installed in a variety of ways, including lay-in grids and direct applied with mechanical fasteners or adhesive. aTiles provide sound control while adding color to the design of any space. Custom shapes and sizes are available. Choose from 16 standard colors.

MOUNTING TYPES

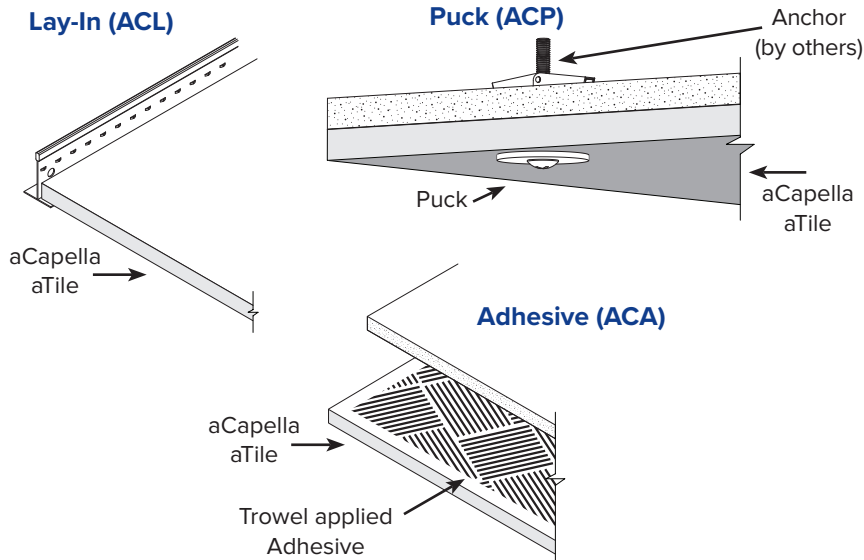

SOUND ABSORPTION - DIRECT MOUNT TO CEILING (ACA, ACP)

| Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | N.R.C. |
|----------|-----|-----|-----|------|------|------|--------|
| ACA, ACP | .12 | .03 | .23 | .59 | .89 | 1.05 | .45 |

Note: NRC based on Type A Mounting.

SOUND ABSORPTION - LAY-IN CEILING (ACL)

| Hz | 125 | 250 | 500 | 1000 | 2000 | 4000 | N.R.C. |
|-----|-----|-----|-----|------|------|------|--------|
| ACL | .89 | .88 | .74 | .86 | .95 | .97 | .85 |

Note: NRC based on E-400 Mounting.



CORE

1/2" Recycled Polyester

SIZES

Puck mount: Up to 4' x 9'

Lay-In: 2' x 2', 2' x 4', 4' x 4', 2' x 6' and 2' x 8'

Adhesive Mount: Up to 4' x 4'

MOUNTING

Pucks, Lay-in grid, Adhesive

FINISH

16 standard colors

EDGES*

Square

*Due to inconsistencies in the aCapella core thickness, we recommend a 1/4" reveal between adjoining panels.

CLEANING

Bleach Cleanable (10:1)

Water-based/Solvent (WS)

Mold & Fungal Resistant (ASTM C1338)

SUSTAINABILITY

Declare, HPD, Indoor Advantage™ Gold

FLAMMABILITY

All components have a Class "A" rating per ASTM E84

COLORS

