aCapella aTILES - Direct Mount Clear Puck (ACP) - Ceiling Installation

G&S ACOUSTICS
Employee Owned


APPLICATION:

For ceiling mounting aCapella aTiles using Clear Pucks.

TOOLS NEEDED:

Drill, 5/16" Spade Drill Bit

MOUNTING HARDWARE:




Clear Puck

INSTALLATION INSTRUCTIONS:


1. Lay aTile panel face up on a flat, clean surface.
   Note: Back side of each aTile panel should be clearly labeled. Follow the directional label on the back of the panel for installation orientation. All panels should be installed with the same orientation.
2. Measure 6" in from each edge of panel and mark the aTile panels. If an aTile panel is greater than 4' long, see drawings on page 2.
3. Drill a 5/16" hole where the Clear Puck will be installed. Repeat for all remaining aTile panels.
4. Install anchors in ceiling as necessary to engage the fasteners (by others) that hold the aTile panel. Each anchor point should hold a minimum of 50 lb. tensile strength per anchor.
5. Lift each aTile panel, face down, into position against the ceiling (do not leave unsupported). Insert appropriate fastener (by others) into the center of each Clear Puck. Install center points first on panels that require more than 4 points. Work from the center to the sides to ensure a tight fit to the ceiling.
6. Tighten fastener through the Clear Puck until snug. **Do not overtighten.** Repeat for all.


Note: Due to inconsistencies in the aCapella core thickness, we recommend a 1/4" reveal between adjoining panels.

Step 2

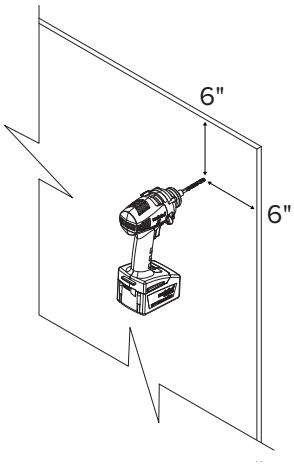

Step 3

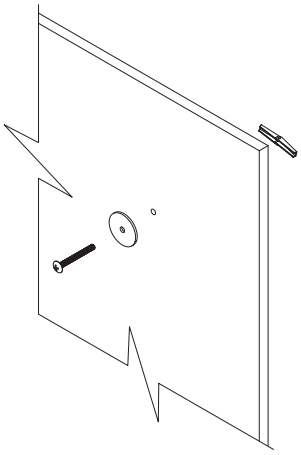

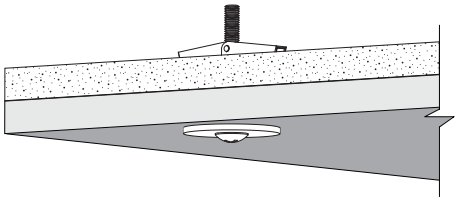

aCapella

aCapella aTILES - Direct Mount Clear Puck (ACP) - Ceiling Installation

HANDLING AND STORAGE

aCapella panels must be stored indoors in a dry, climate controlled environment at all times. Exposure to moisture, excessive heat or humidity can cause panels to warp and/or stain.

Panels should be stored in a flat, fully supported, horizontal position and NOT on edge. It is recommended that 2 people carry each panel. Panel should be carried on edge, being careful not to bend panel at any time. Clean white gloves are also recommended when handling aCapella panels.

